

FIG. 1

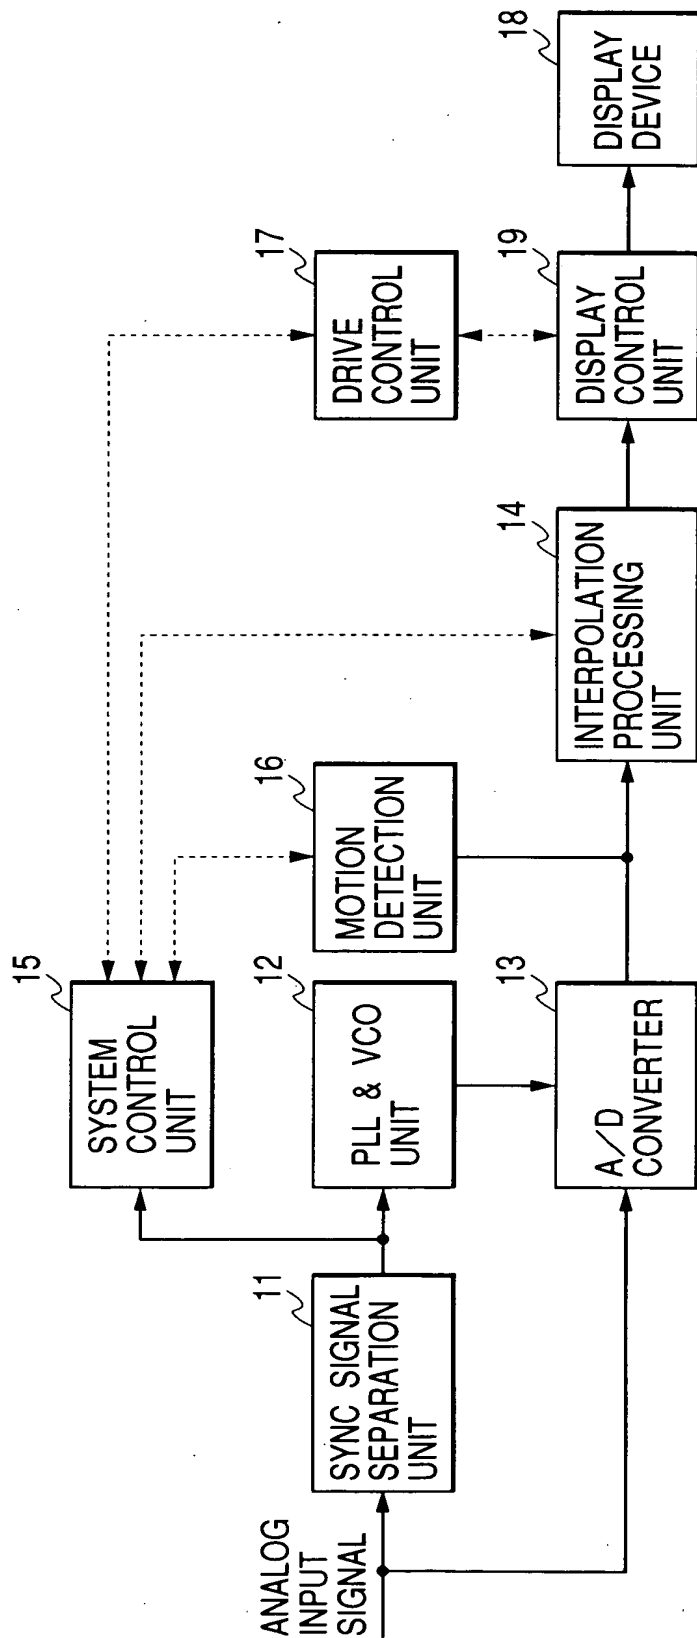


FIG. 2






FIG. 2A

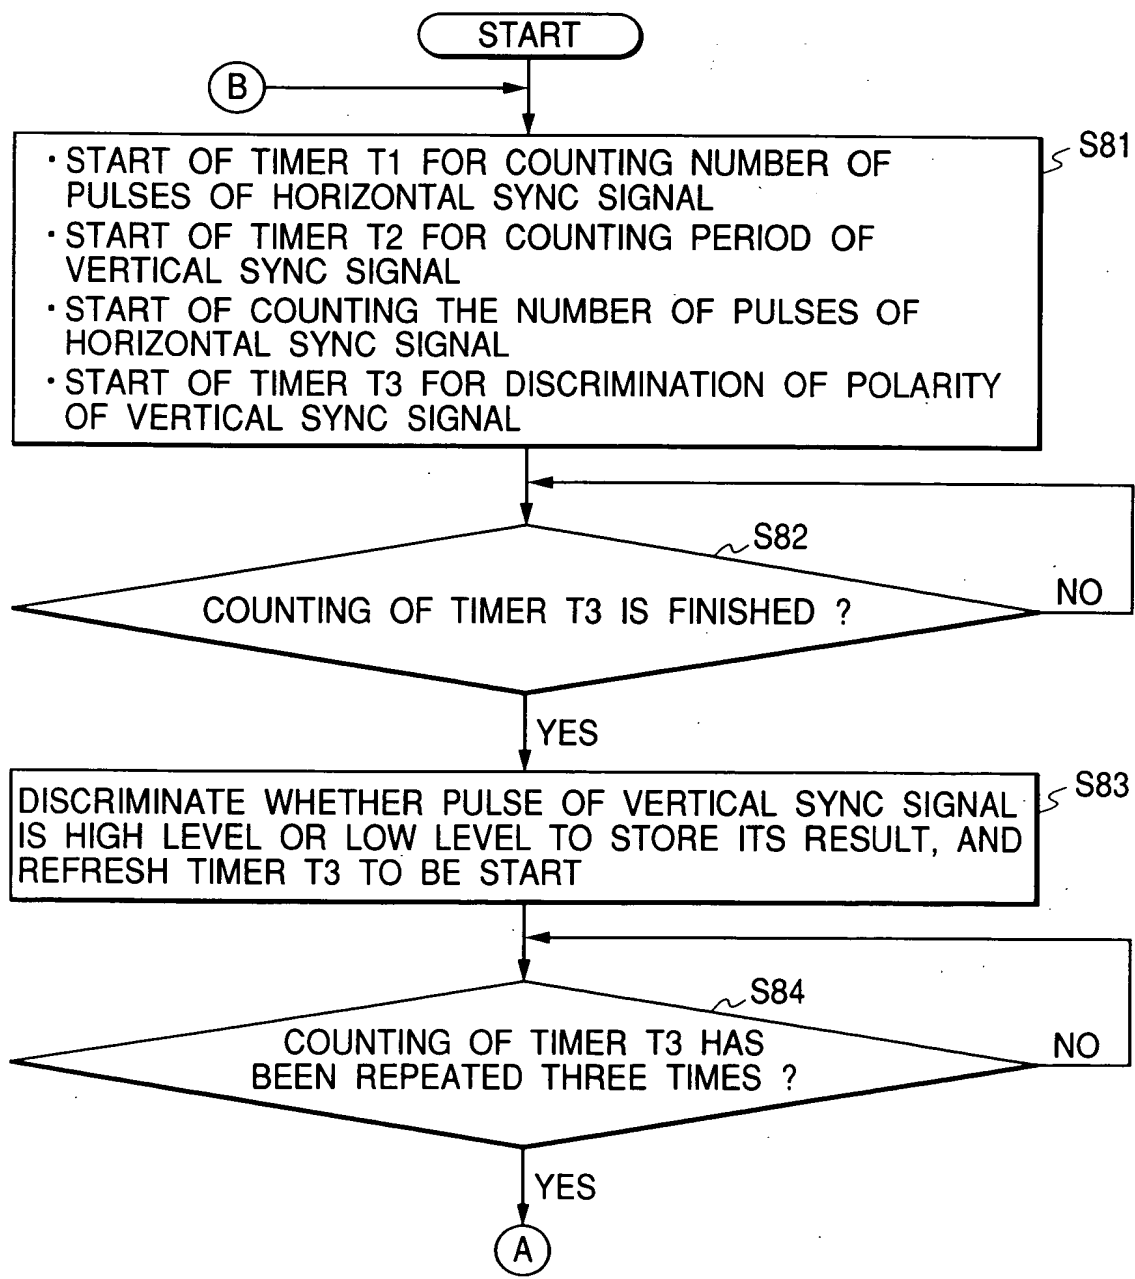

465727 4446580

FIG. 2B

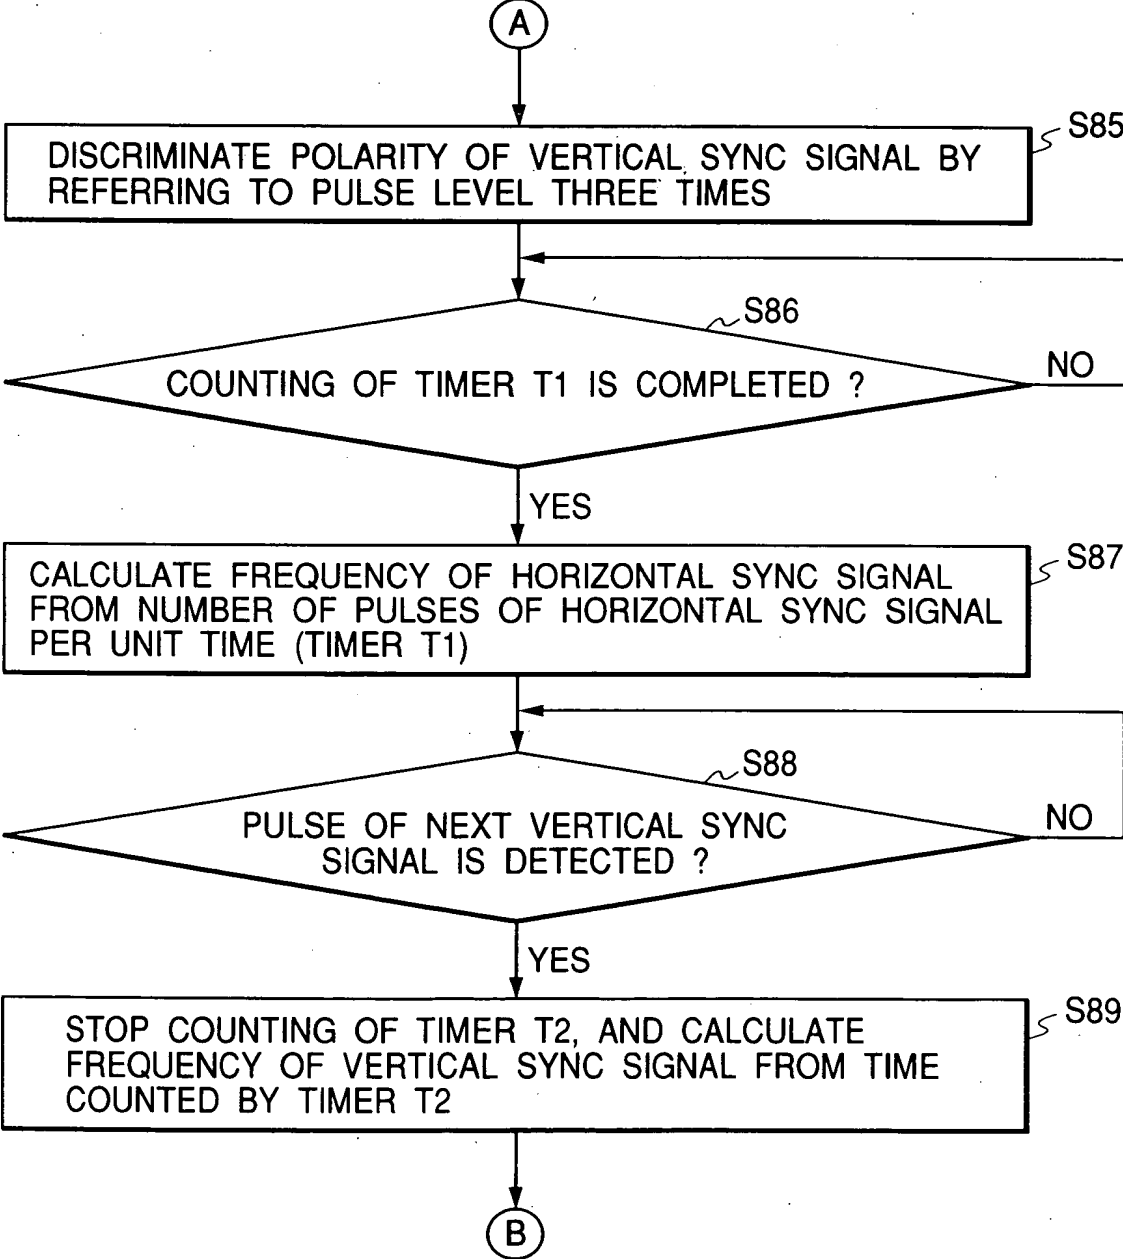

466T2 4446680

465T2T" 4446680

FIG. 3


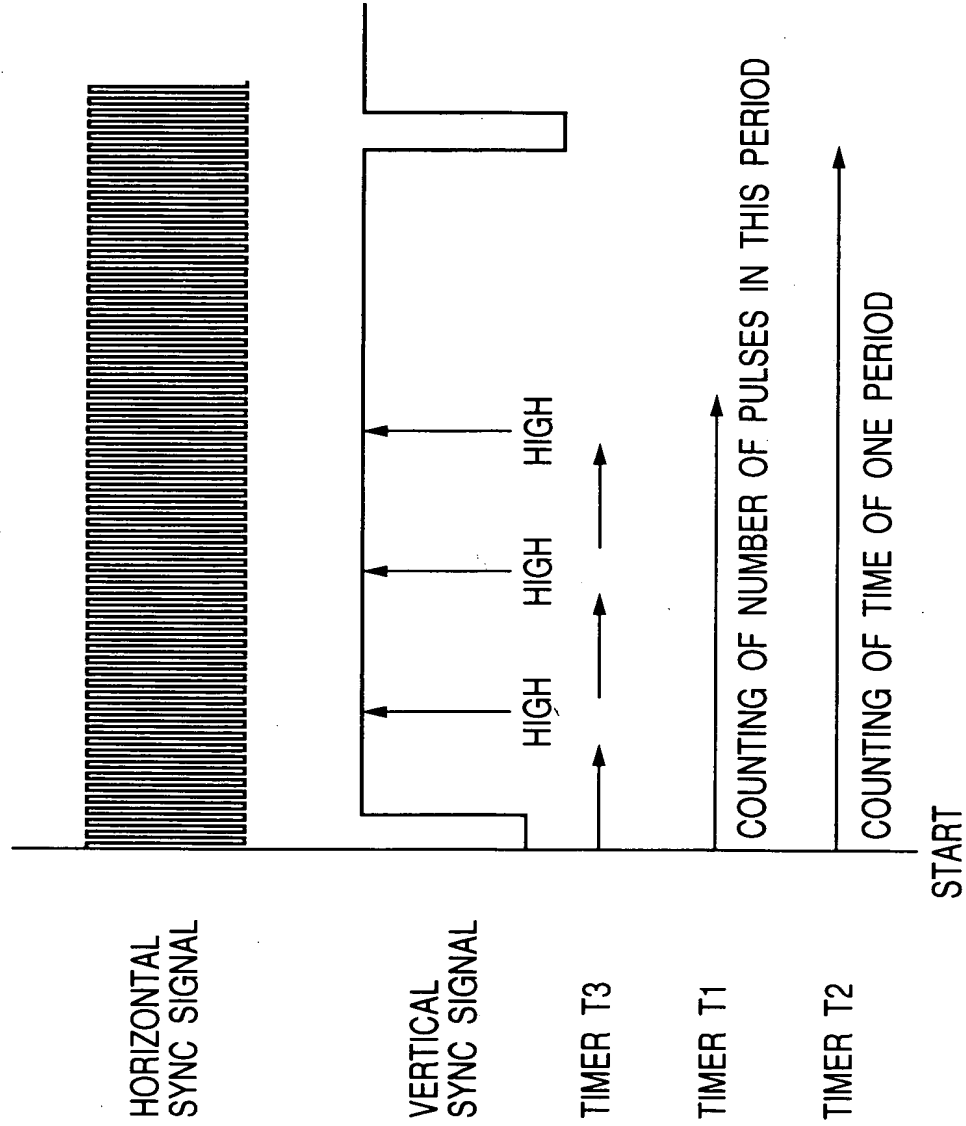



FIG. 4

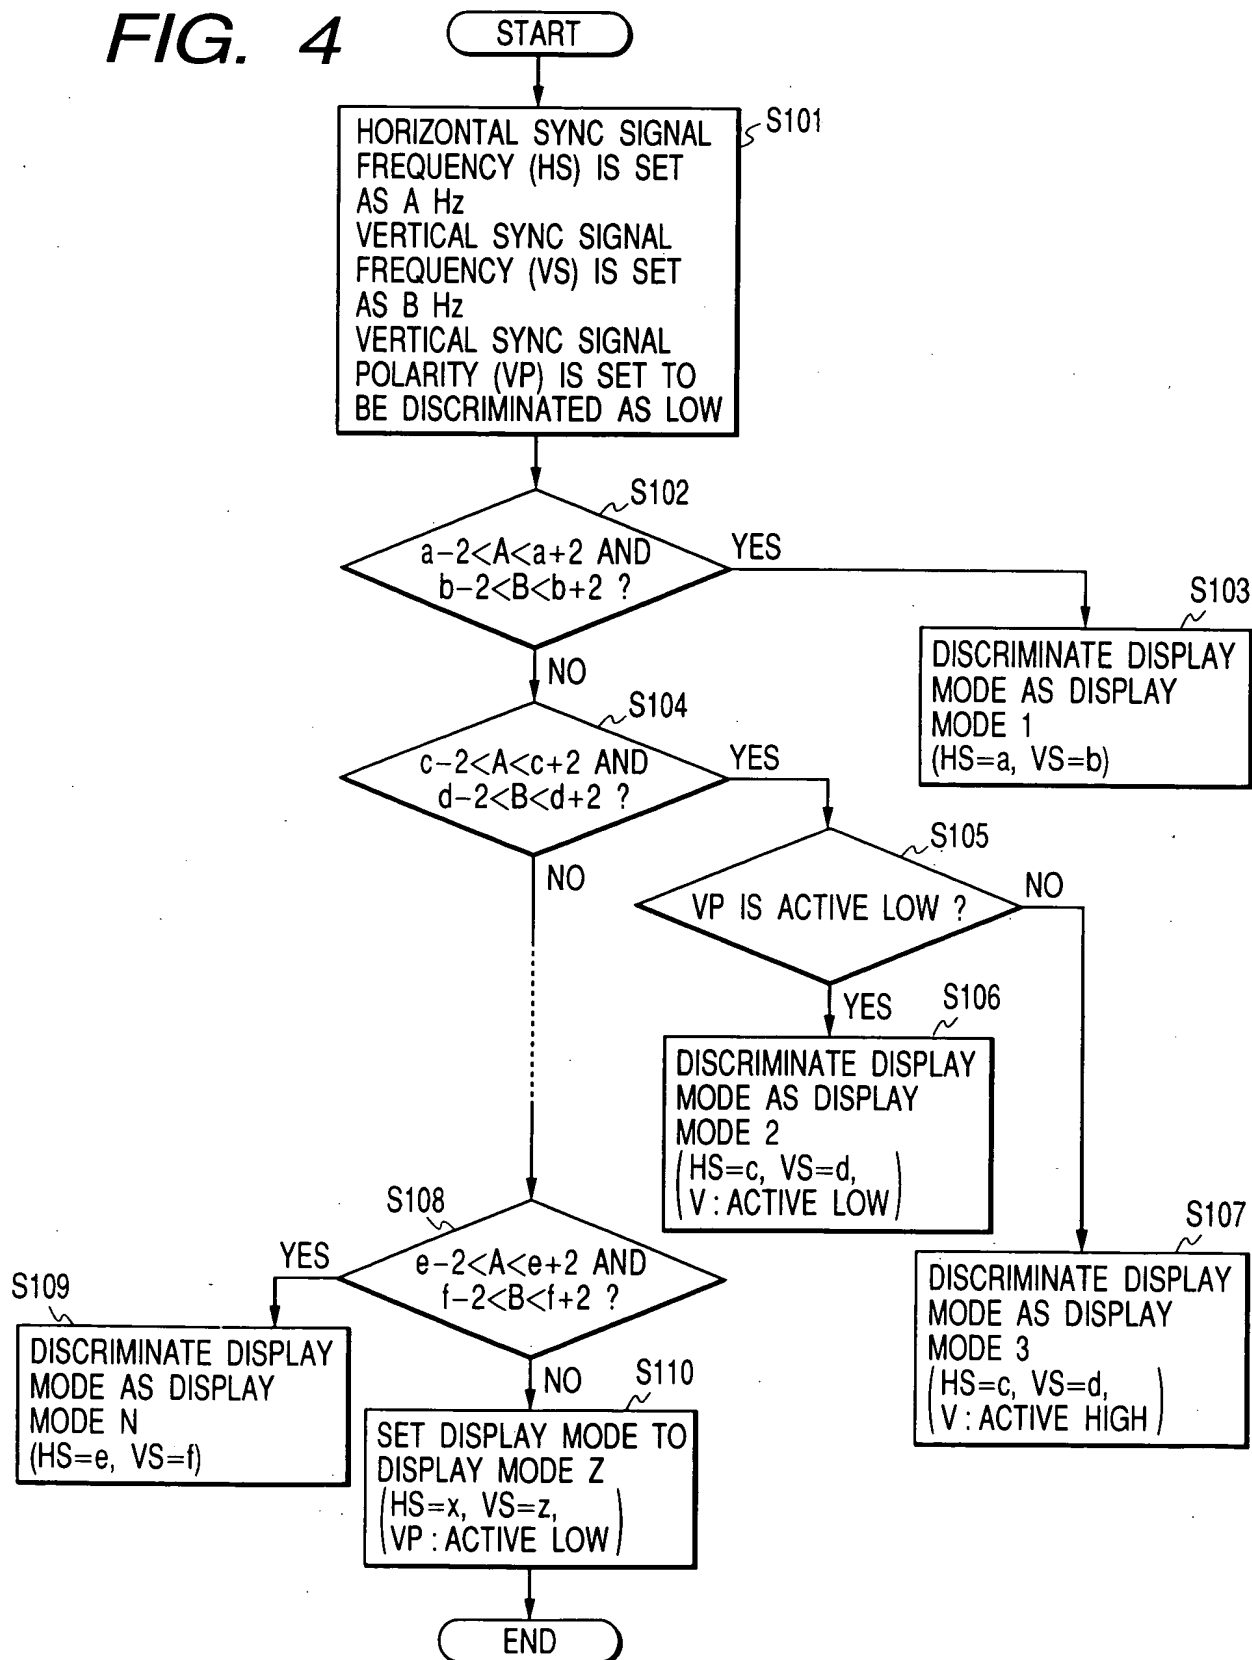

DESIGNED	O.G. FIG.	
BY	CLASS	SUBCLASS
RAFTSMAN		

6 / 14

FIG. 5

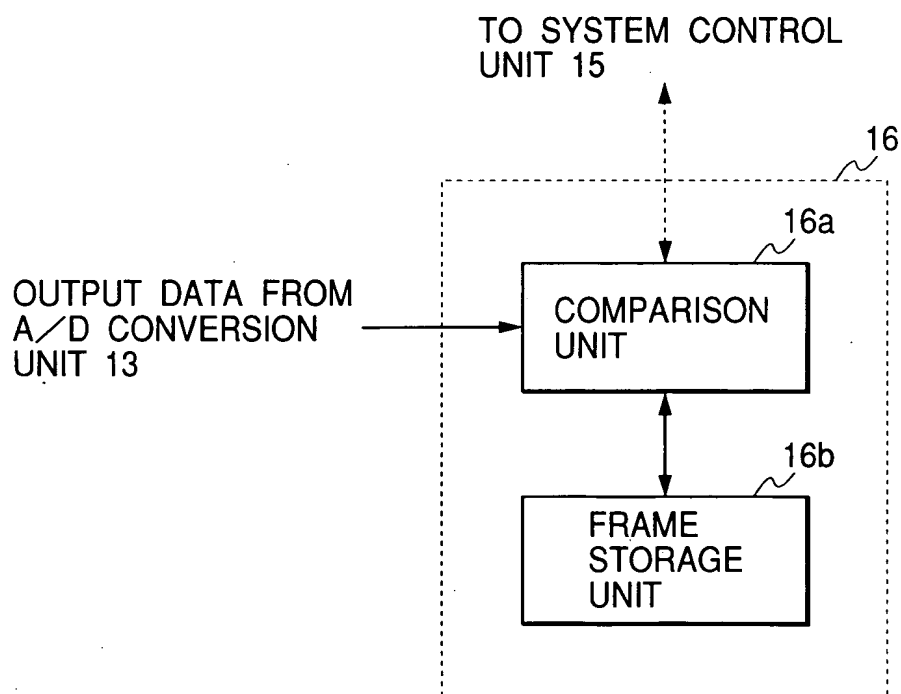

465227 4446680

7/14

FIG. 6

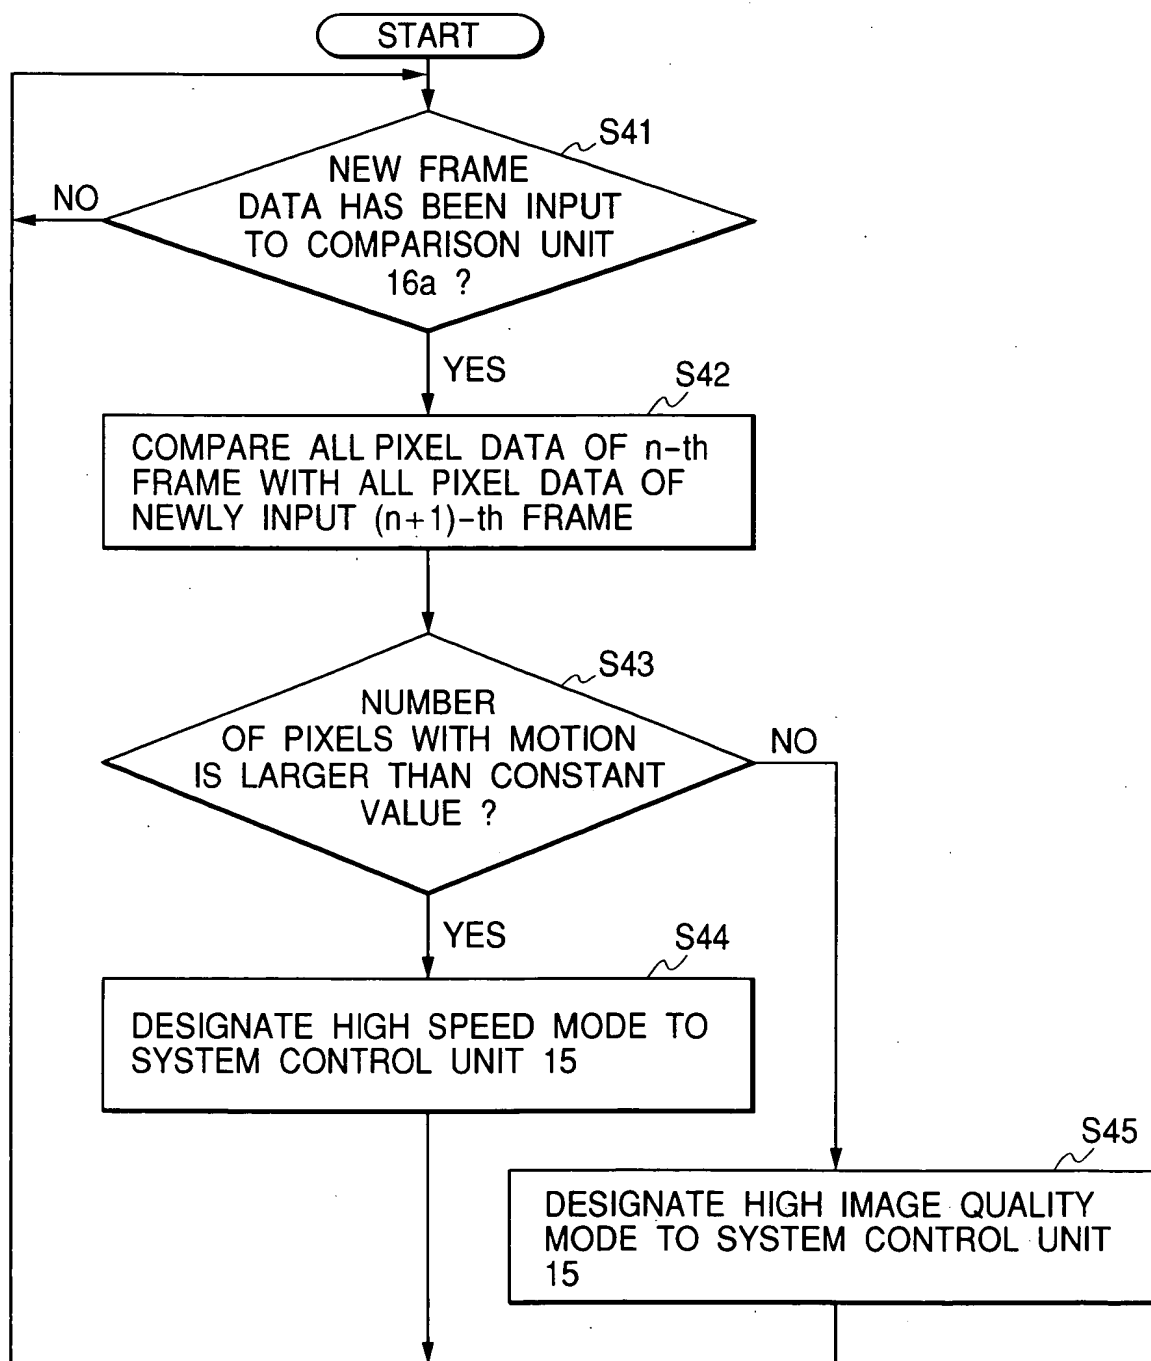


FIG. 7A


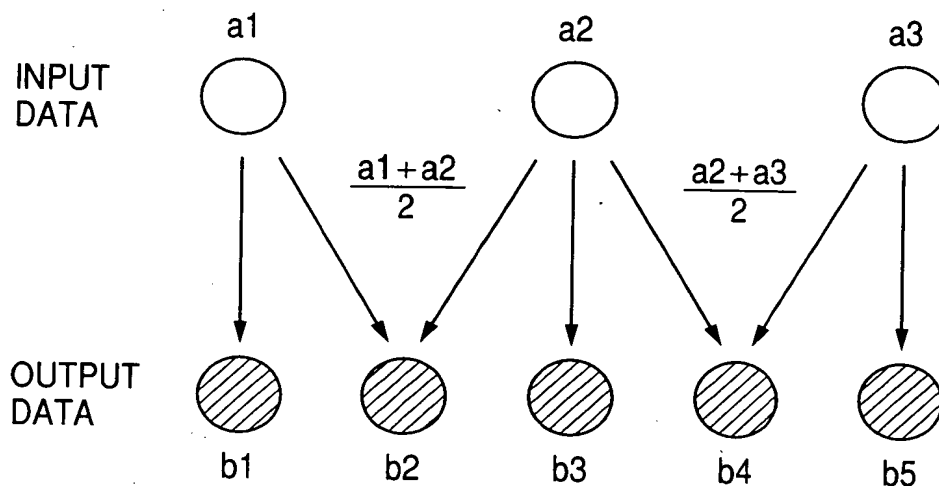


FIG. 7B

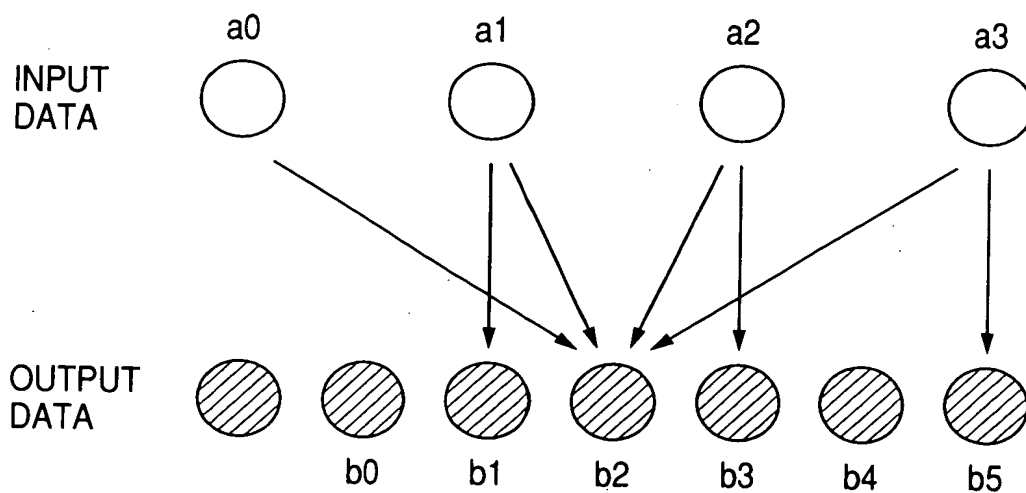


466T27-4746580

265727 4446580

FIG. 8A


IN HIGH SPEED MODE



INPUT DATA



ONLY HORIZONTAL DIRECTION IS INTERPOLATED TO HORIZONTAL RESOLUTION OF DISPLAY DEVICE

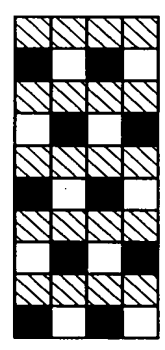

TWO LINES ARE SIMULTANEOUSLY DRIVEN TO DISPLAY SAME DATA


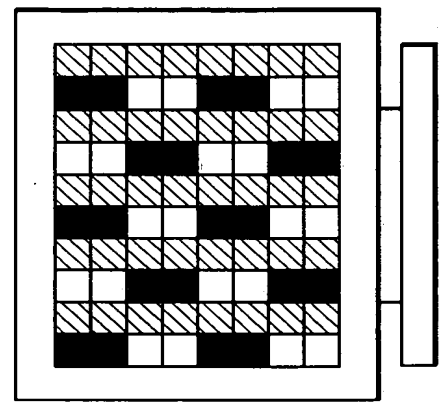


FIG. 8B


IN HIGH IMAGE QUALITY MODE




INPUT DATA



HORIZONTAL AND VERTICAL RESOLUTIONS ARE INTERPOLATED TO THOSE OF DISPLAY DEVICE

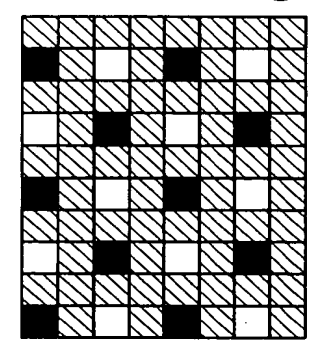

DATA HAVING RESOLUTION EQUAL TO THAT OF DISPLAY DEVICE IS DRIVEN TO BE DISPLAYED

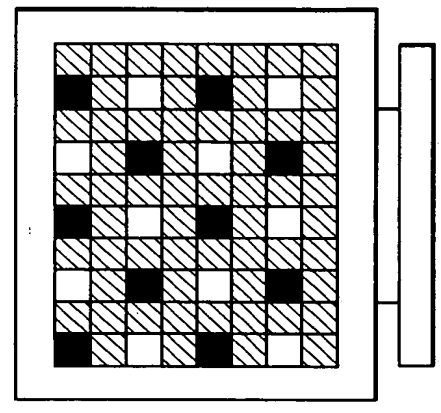

465T2T" 4444580

FIG. 9

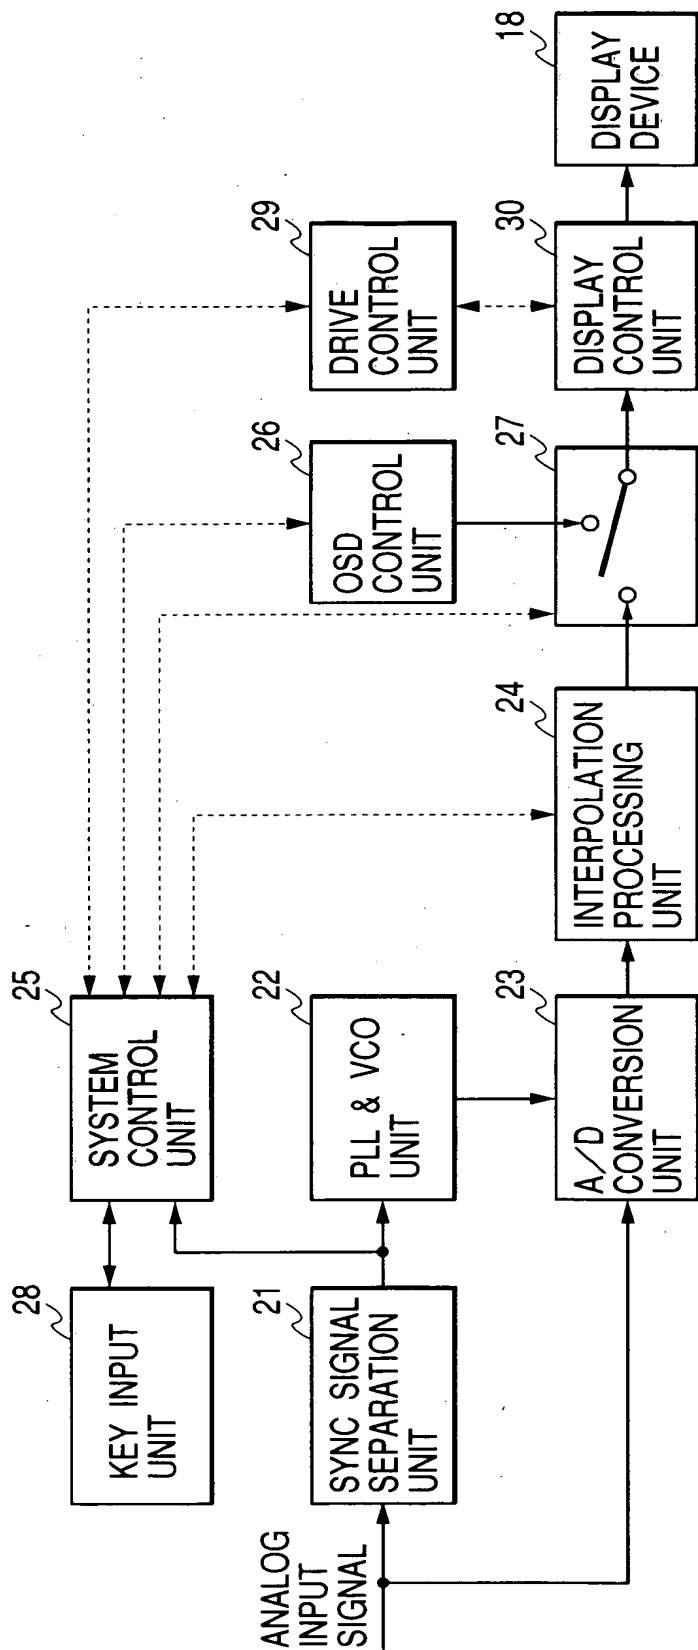


FIG. 10A

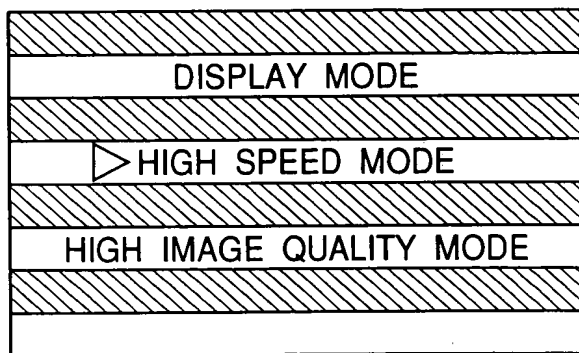


FIG. 10B



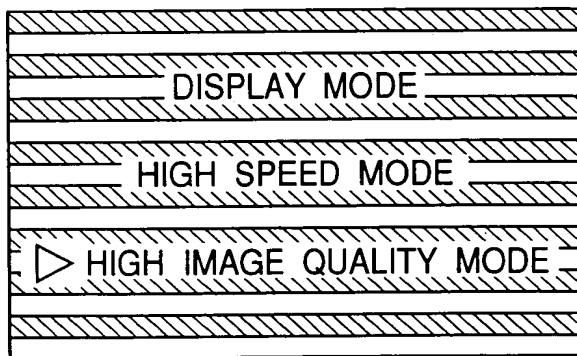


FIG. 10C

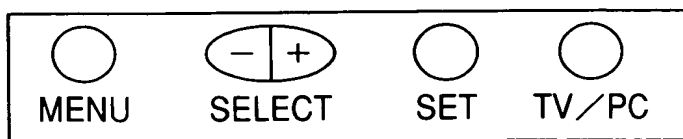

465T2T" 4446680

FIG. 11

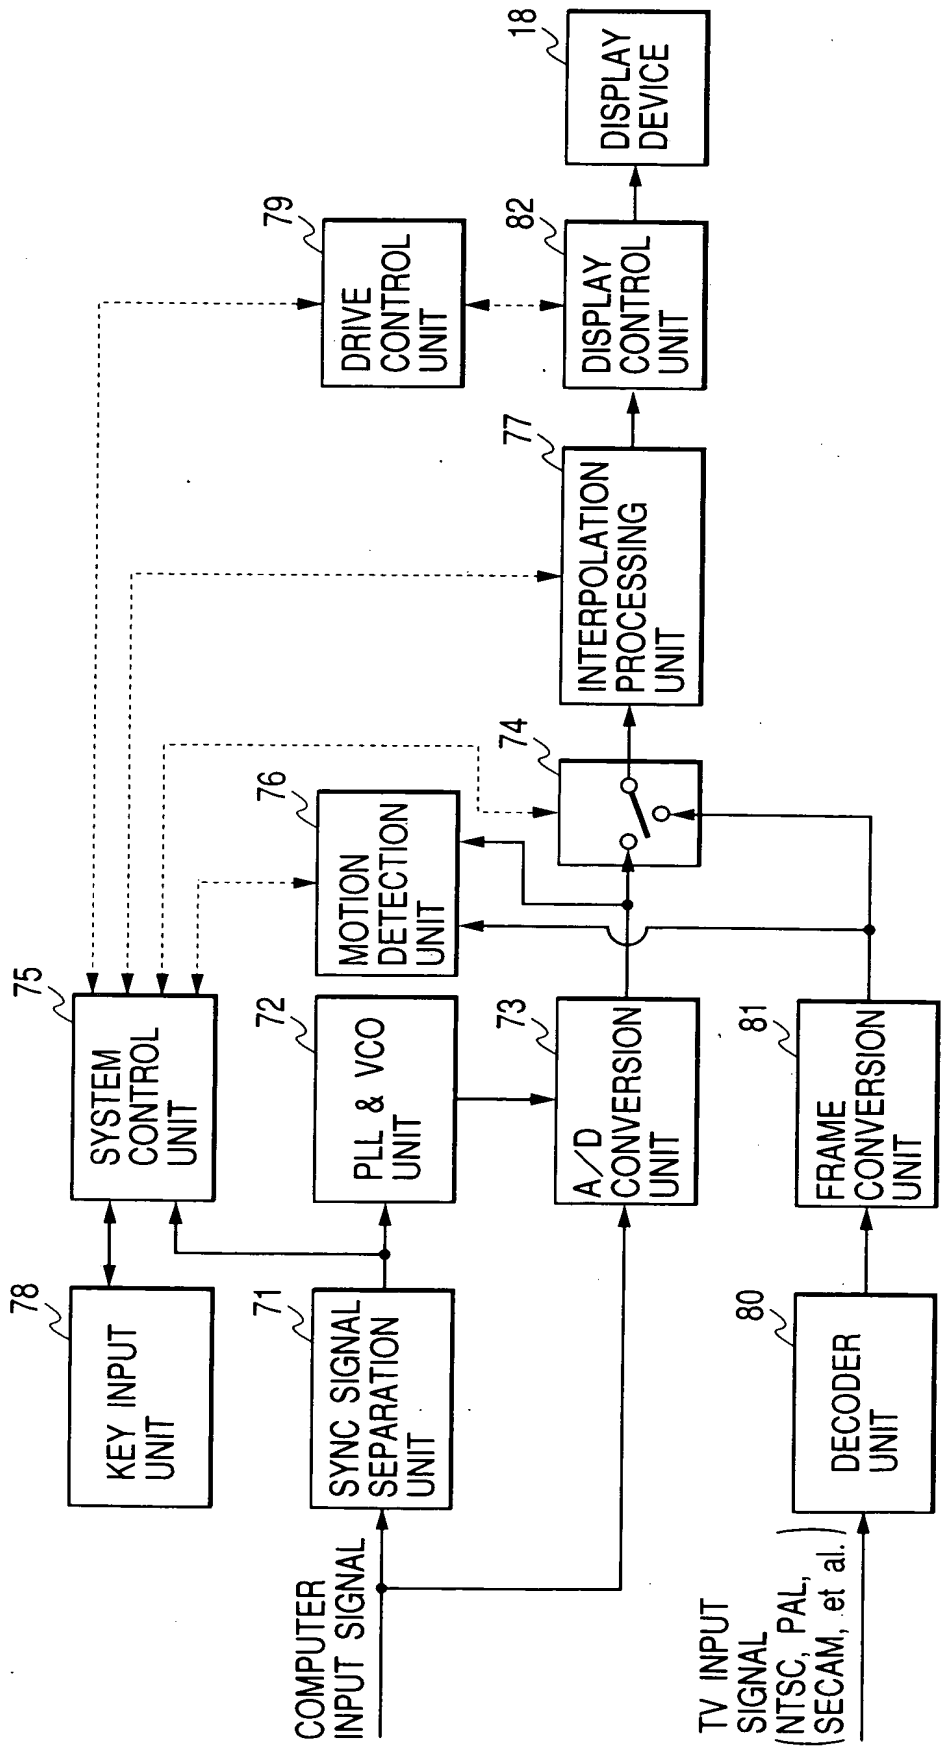

4515T2T 2444680

FIG. 12

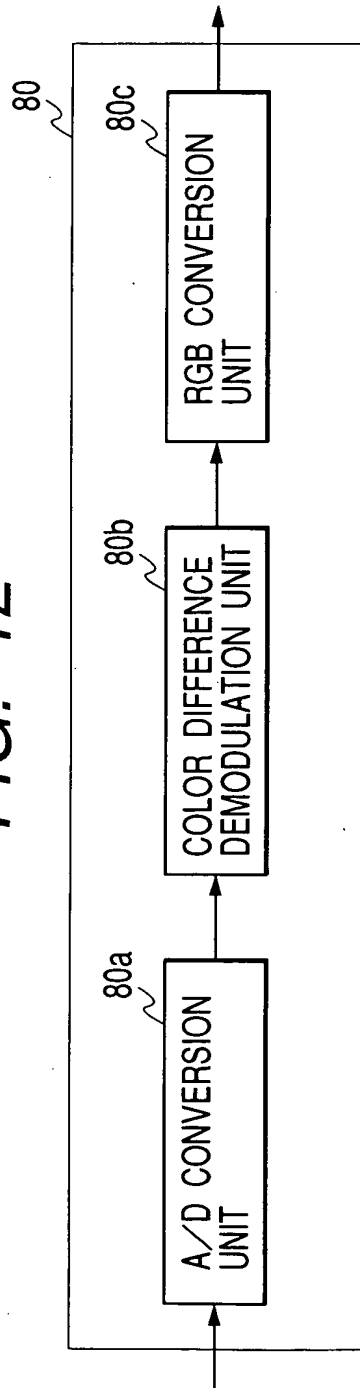


FIG. 13

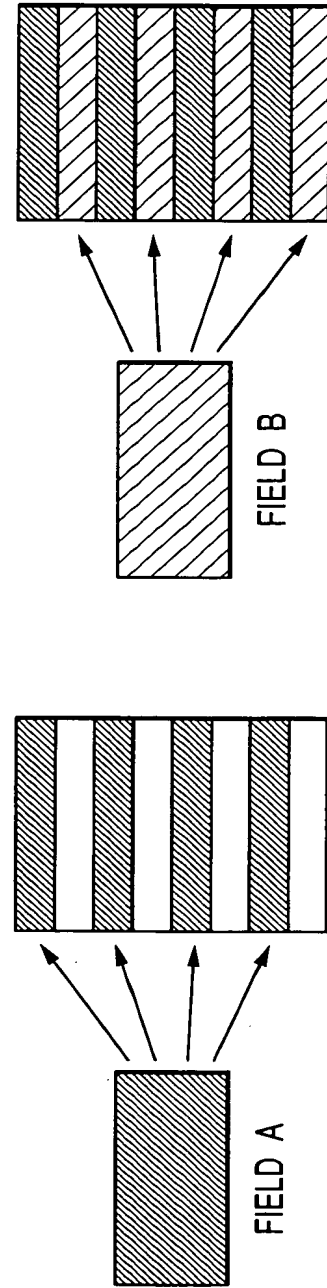


FIG. 14

